



Xenon™
2 P+E sockets - French standard

Cat. No(s): 0 506 70/71



0 506 70



0 506 71


1. USE

2 P+E sockets 16 A and RJ 45, with surge protection.

2. RANGE

| Cat. Nos | Description | Finishes |
|----------|--|------------|
| 0 506 70 | Protected socket 1 x 2 P+E 16 A + 2 x RJ 45 + Surge protection for HC and LC + Cable RJ 11 (1.5 m) | White/Grey |
| 0 506 71 | Protected socket 1 x 2 P+E 16 A + Charger 2 x USB + Surge protection for HC + Cable reel with micro USB (1 m) | White/Grey |

3. OVERALL DIMENSIONS (mm)

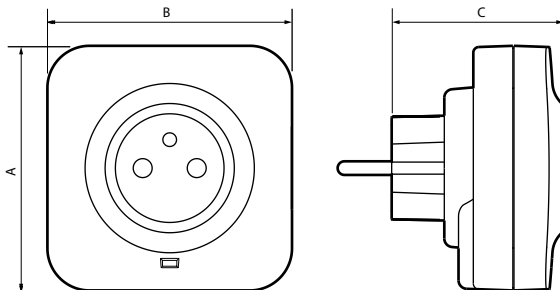

| Cat. Nos | A | B | C |
|----------|----|----|----|
| 0 506 70 | 86 | 86 | 60 |
| 0 506 71 | 86 | 87 | 63 |

4. TECHNICAL CHARACTERISTICS

■ **4.1 Mechanical characteristics**

Impact test: IK 04
 Protection against solid objects and liquids: IP 20

■ **4.2 Material characteristics**

Self-extinguishing:
 + 750° C / 30 s for insulating parts in place now live parts.
 + 650° C / 30 s for the other parts of insulating material.

■ **4.3 Electrical characteristics**

Voltage: 250 VAC
 Current: 16 A
 Power: 3500 W max.
 USB sockets type A pour 0 506 71: 5 V - 1 A.

Surge protection high current sockets:

| Cat. Nos | Type of surge | Uc | Uoc | Up |
|----------|----------------------------|-------|------|-----|
| 0 506 70 | Common mode + differential | 230 V | 4 kV | 1kV |
| 0 506 71 | Differential mode | 230 V | 4 kV | 1kV |

Surge protection low current sockets:

| | Uc | Up | I _{max} | I _n |
|---------------|-------|-------|------------------|----------------|
| RJ 45 sockets | 200 V | 600 V | 1,5 kA | 1 kA |

■ **4.4 Climatic characteristics**

Use temperature: - 5° C to + 35° C
 Storage temperature: - 15° C to + 70° C

5. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.