



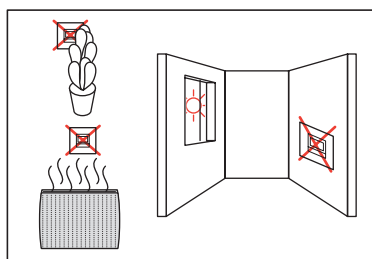
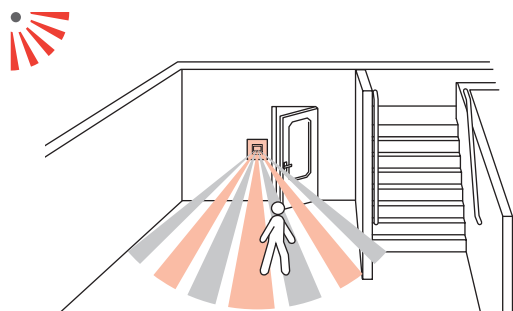
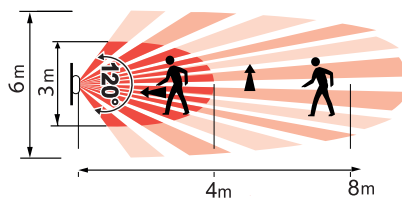
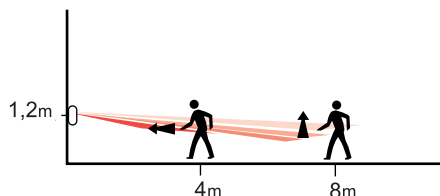


| | |
|--|-------------------------|
| | 100 - 240 V~ |
| | 50 / 60 Hz |
| | 100 ms |
| | 500 mA max. |
| | 2 x 2,5 mm ² |
| | -5°C / +45°C |
| | PIR |
| | 1000 lux |
| | 12 min. |
| | 8 m - 120° |

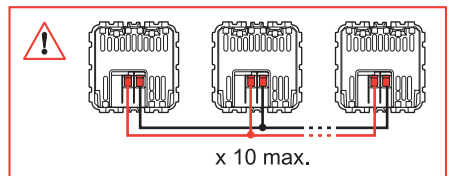


4 126 02
0 047 04

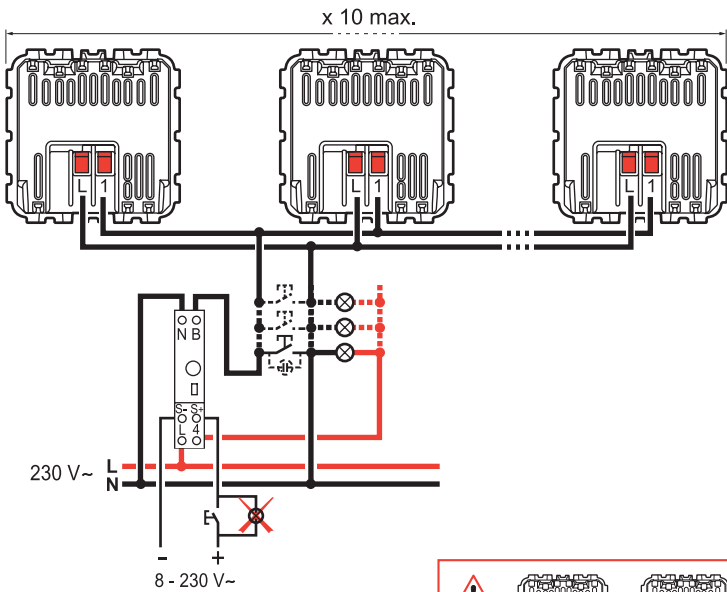



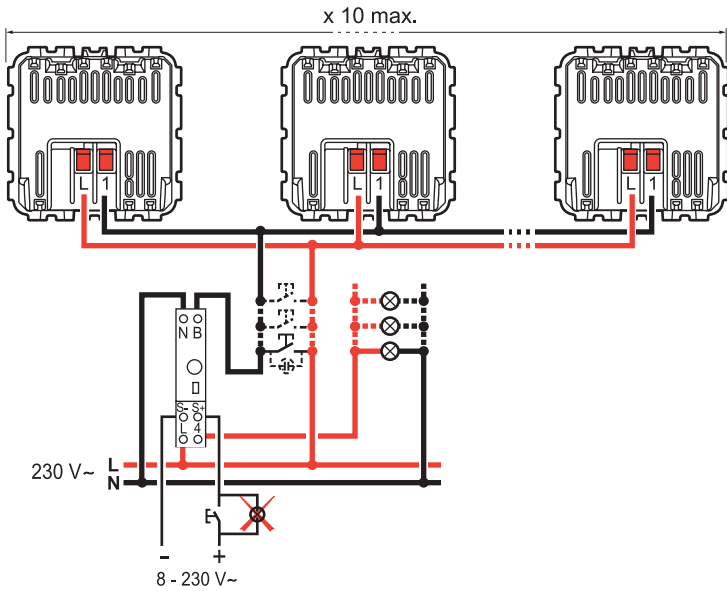




! Le temps réglé sur la minuterie et sur tous les détecteurs doit être égal ($\pm 10\%$)

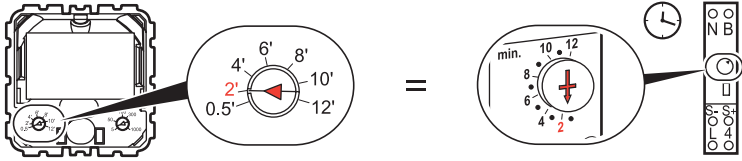

Auto ON/OFF



i www.legrandoc.com

